



# STAINLESS STEEL DRAINAGE PUMPS - DLS SERIES

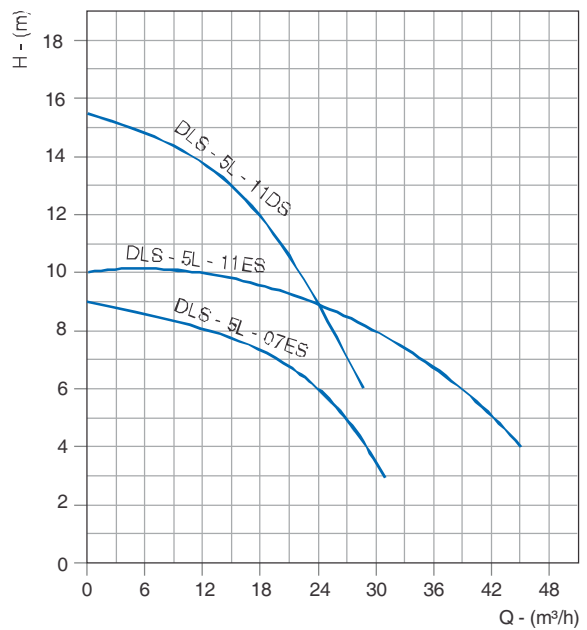

Impeller type	Impeller mtrl.
Closed Multi Channel	S.S 304

## PERFORMANCE CURVES

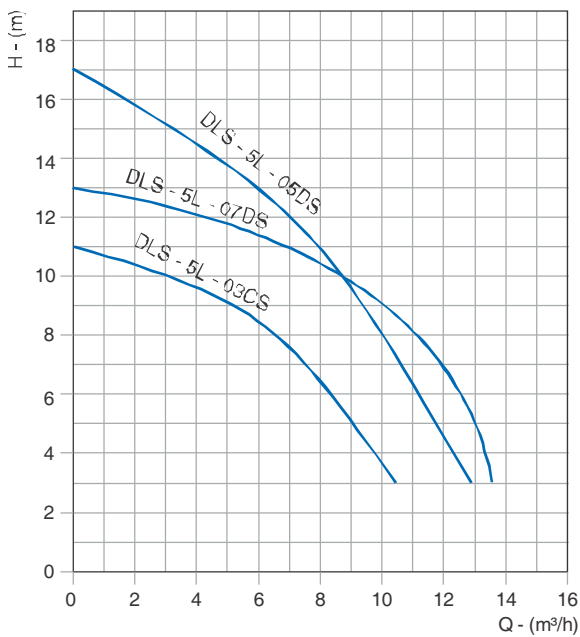

## PERFORMANCE DATA

Model		Outlet Size (mm)	Motor Power		Rated Head (m)	Rated Flow (m³/h)	Max. Head (m)	Approx. Weight (kg)
Single Phase	Three Phase		kW	HP				
DLS - 5L - 03CS	DLS - 5L - 03CT	40	0.37	0.5	9	5	11	8.5
DLS - 5L - 05DS	DLS - 5L - 05DT	50	0.55	0.75	13	6	17	12.3
DLS - 5L - 07DS	DLS - 5L - 07DT	50	0.75	1	9	10	13	12.9
DLS - 5L - 07ES	DLS - 5L - 07ET	65	0.75	1	6	24	9	13.3
DLS - 5L - 11DS	DLS - 5L - 11DT	50	1.1	1.5	13	15	15.5	14.5
DLS - 5L - 11ES	DLS - 5L - 11ET	65	1.1	1.5	6	39	10	14.3

Only single phase pumps are provided with float switch.

In view of continuous developments, the information / descriptions / specifications / illustrations are subject to change without notice.